

PROJECT	TYPE
CATALOG NUMBER	

KEY FEATURES

- Extruded aluminum construction, only 1/4" thick
- Clear epoxy shielding for wet location use
- Do not submerge in water
- Connectors available (see below)
- Class 2
- Dimmable. For a complete list of applicable dimmers, please consult product page on website.

ELECTRICAL

- 12VDC
- Each LED is 0.16W = 3.04W per foot
- Amps: 8": 0.14A, 16": 0.26A, 24": 0.438A
- Rated life: 50,000 hrs.

OPTICS

- 2700K, 3500K, 5500K
- Clear epoxy shield

CERTIFICATION

- ETL


WARRANTY

- 5 year warranty




PRODUCT DESCRIPTION

LED Aluminum Linear LightBar is a 7-3/4", 15-1/4" or 23-5/8" rigid and unobtrusive (only 6mm / .25" thickness) Dimmable High Output LED LightBar that can be interconnected in series from one low voltage DC power source. 50,000 hour LED life.

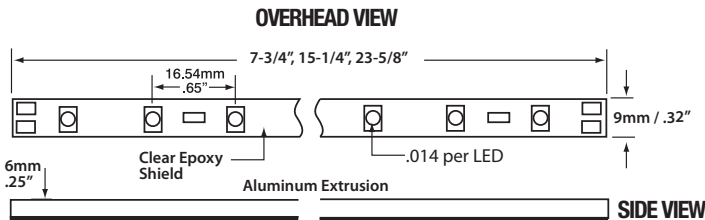

LED LightBars can be butted together.

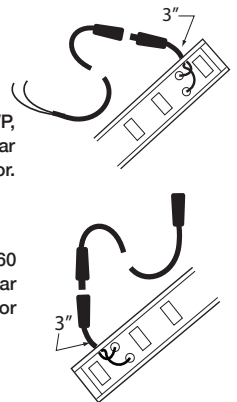

FIXTURE ORDERING INFORMATION

Catalog No.	Length	Color*	LED Wattage	Lumens / Bar	Finish
LTAB-N-8-27	7-3/4"	2700K	0.14W (1.68W/bar)	101	Brushed Aluminum
LTAB-N-16-27	15-1/4"	2700K	0.14W (3.36W/bar)	203	Brushed Aluminum
LTAB-N-24-27	23-5/8"	2700K	0.14W (5.20W/bar)	304	Brushed Aluminum
LTAB-N-8	7-3/4"	3500K	0.14W (1.68W/bar)	132	Brushed Aluminum
LTAB-N-16	15-1/4"	3500K	0.14W (3.36W/bar)	264	Brushed Aluminum
LTAB-N-24	23-5/8"	3500K	0.14W (5.20W/bar)	396	Brushed Aluminum
LTAB-N-8-PW	7-3/4"	5500K	0.14W (1.68W/bar)	168	Brushed Aluminum
LTAB-N-16-PW	15-1/4"	5500K	0.14W (3.36W/bar)	336	Brushed Aluminum
LTAB-N-24-PW	23-5/8"	5500K	0.14W (5.20W/bar)	504	Brushed Aluminum

Includes (2) plastic mounting clips, (4) stainless steel screws, (1) male plug to seal end of run and 2-way double stick tape for concealing connectors to mounting surface. (1) 24" lightbar to power supply connector (LTW-24-WP) included with each lightbar.

LTW-24-WP, LTW-48-WP, LTW-60-WP LightBar to power supply connector.

LTCWP-12, -24, -36, -60 LightBar to LightBar flexible connector

POWER SUPPLIES

- Please see our website at gmlighting.net

PHOTOMETRICS

- Please see our website at gmlighting.net

CONNECTORS AND ACCESSORIES

Catalog No.	Length
LTCWP-12	12" Lightbar to lightbar connector
LTCWP-24	24" Lightbar to lightbar connector
LTCWP-36	36" Lightbar to lightbar connector
LTCWP-60	60" Lightbar to lightbar connector
LTW-24-WP	24" Lightbar to power supply connector

Catalog No.	Length
LTW-48-WP	48" Lightbar to power supply connector
LTW-60-WP	60" Lightbar to power supply connector
LTAB-N-SB	Swivel bracket - 2 pack w/ 4 stainless steel screws
GMSB-W	Splice box - white - 2"L x 1"W x 5/8"D
GMSB-B	Splice box - black - 2"L x 1"W x 5/8"D

* Kelvin temperature (color) ±200K