Ceiling LED Pendant

PD65116-UNV

INSTALLATION SHEET

START FROM HERE


- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120-277V input

- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b)
- **3.** Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- 4. See Page 2 for fixture body assembly
- Determine hanging height of fixture by securing rods (2d) to canopy (2a) and fixture rod (5b) after feeding fixture wires (LED+ and LED-) through rods
- Make proper electrical connections between LED and DC driver, LED- Negative, LED+ Positive using quick connector provided (See Illustration 1 and refer to diagram on driver)
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package and place driver (4a) inside canopy (2a)
- **8.** Attach canopy **(2a)** to mounting plate **(1c)** with canopy screws **(2b)**

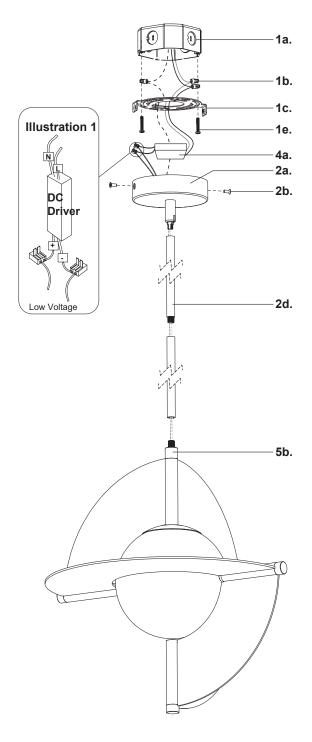



Ceiling LED Chandelier

CH65127-UNV

INSTALLATION SHEET

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference


Technical Support: 1-855-855-8926


Please Note

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application
- 120-277V input


Fixture Body Assembly

1. Secure shades (5a) to fixture rod (5b) with screws (5c). Repeat for bottom section

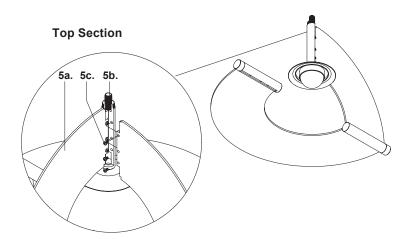

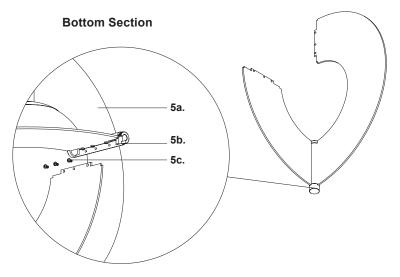

2. Attach glass (6a) to top section by threading clockwise to secure. Attach screw cover (6c) to fixture rod (5b) and secure with finial (6b) by threading clockwise



3. Attach bottom section to top section with screws **(6a)**, followed by screw cover **(6c)** and secure with finial **(6b)** by threading clockwise

